


INSULATED CANTED ROOF CURB



Breidert
Air Products

6393 Powers Avenue
Jacksonville, Florida 32217-2298
P: 904.731.4711 / F: 904.737.8322
www.breidert.com

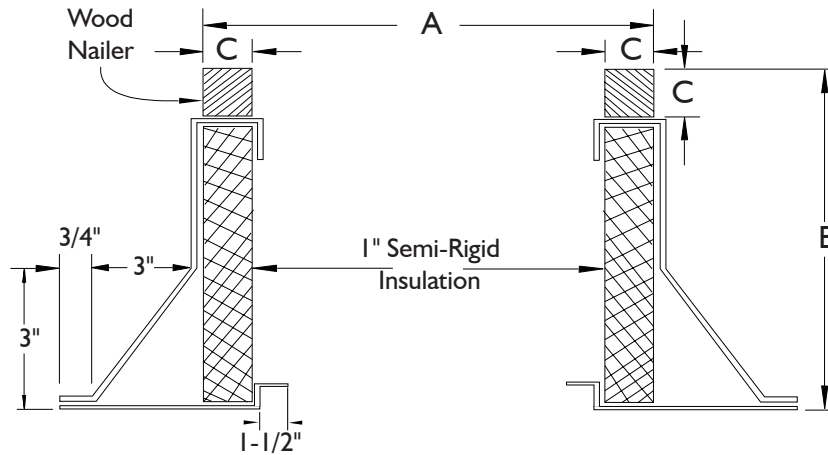

OPTIONS:

1. Insulation retainers - solid or screen type.
2. Burglar bars - 1/2" dia. on 6" centers.
3. Finishes - baked or air-dried enamel or epoxy.
4. Heights: 8, 12, or 16".
5. Single pitch, double pitch or flat style.
6. Damper Tray.

FAN SIZE	"A" OD (Square) CURB / RF TYPE							"B" CURB HEIGHT	"C" WOOD NAILER	GAUGES	WT.
	CENT. SUPPLY (KSF)	CENT. SUPPLY (CSF, LSF)	CENT. SUPPLY (SRT)	UPBLAST ROOF (UBB, UBS, UBX, UBRD)	UPBLAST ROOF (UBSRD, UBSRD-HT, UBSRD-HTI)	UPBLAST ROOF (TUB, TUB-HT)	HOODED ROOF (HREB-C, HRSB, HRED-C, HRSD, HRSBF, HRSDF)				
9	22-3/4	22-3/4	-	-	-	-	-	12" STD	1-1/2" Sq	18	34
10	26-1/2	26-1/2	14-3/4	-	-	-	36				
12	30-1/2	26-1/2	-	-	-	-	36				
15	30-1/2	30-1/2	-	-	-	-	36				
18	34-5/8	34-5/8	-	-	-	-	40				
20	49	49	-	-	-	-	58				
24	-	-	-	31	28-1/2	33-1/4	33-1/4				39
30	-	-	-	37	34-1/2	39-1/4	39-1/4				46
36	-	-	-	43	40-1/2	45-1/4	45-1/4				54
42	-	-	-	49	46-1/2	51-1/4	51-1/4				61
48	-	-	-	55	52-1/2	57-1/4	57-1/4				68
54	-	-	-	61	58-1/2	63-1/4	63-1/4				75
60	-	-	-	67	64-1/2	69-1/4	69-1/4	82			

1. Standard construction is shown. If special construction is required, note changes below and highlight.
2. G-90 galvanized welded steel construction.

ACCESSORY ITEMS	1	2	3	4	5	ACCESSORY ITEMS	1	2	3	4	5
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					
<input type="checkbox"/>						<input type="checkbox"/>					

Project: _____ Submitted: _____
 Customer: _____ Approved: _____
 Location: _____